

# Product data sheet

Specifications



## Empty pendant control station, Harmony XAC, plastic, yellow, 4 cut outs

XACA04

### Main

|                           |                         |
|---------------------------|-------------------------|
| Range of product          | Harmony XAC             |
| Product or component type | Pendant control station |
| Device short name         | XACA                    |

### Complementary

|                                       |                                                                  |
|---------------------------------------|------------------------------------------------------------------|
| Control station type                  | Double insulated                                                 |
| Enclosure material                    | Polypropylene                                                    |
| Electrical circuit type               | Control circuit                                                  |
| Enclosure type                        | Empty enclosure                                                  |
| Number of cut-out                     | 4 cut-outs                                                       |
| Control station colour                | Yellow                                                           |
| Cable entry                           | Rubber sleeve with stepped entry 8...26 mm                       |
| Guard rail                            | Without                                                          |
| Vertical operator cut-out centre      | 30 mm                                                            |
| Standards                             | UL 508<br>EN/IEC 60204-32<br>EN/IEC 60947-5-1<br>CSA C22.2 No 14 |
| Product certifications                | CCC<br>GOST                                                      |
| Protective treatment                  | TH                                                               |
| Ambient air temperature for operation | -25...70 °C                                                      |
| Ambient air temperature for storage   | -40...70 °C                                                      |
| Vibration resistance                  | 15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6               |
| Shock resistance                      | 100 gn conforming to IEC 60068-2-27                              |
| Overvoltage category                  | Class II conforming to IEC 61140                                 |
| IP degree of protection               | IP65 conforming to IEC 60529                                     |
| IK degree of protection               | IK08 conforming to EN 50102                                      |
| Mechanical durability                 | 1000000 cycles                                                   |
| Net weight                            | 0.54 kg                                                          |

Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 45.500 cm |
| Package 1 Width              | 9.000 cm  |
| Package 1 Length             | 8.500 cm  |
| Package 1 Weight             | 602.000 g |
| Unit Type of Package 2       | P06       |
| Number of Units in Package 2 | 48        |
| Package 2 Height             | 73.500 cm |
| Package 2 Width              | 80.000 cm |
| Package 2 Length             | 60.000 cm |
| Package 2 Weight             | 33.400 kg |

Offer Sustainability


|                            |                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                                                                      |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                          |
| REACH free of SVHC         | Yes                                                                                                                                                                                                                                                                                                                                        |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                                                                                                                                                                                                                                          |
| Toxic heavy metal free     | Yes                                                                                                                                                                                                                                                                                                                                        |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                                                                        |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                                                                                                                                                                                                                                     |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                                                                        |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                                                                              |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a> |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

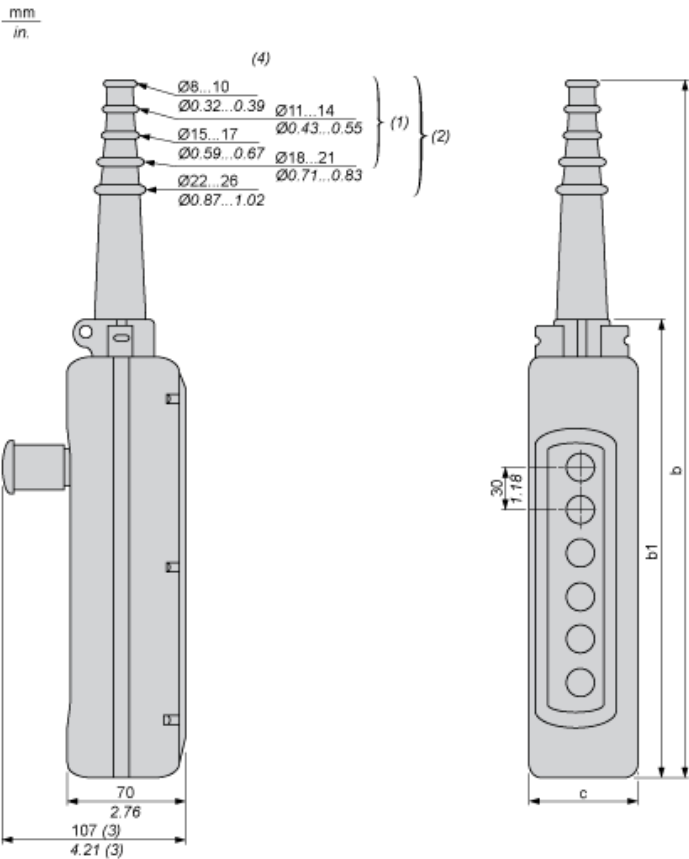

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal ø

Dimensions in mm

| Number of cut-outs | 2   | 3   | 4   | 5   | 6   | 8   | 12  |
|--------------------|-----|-----|-----|-----|-----|-----|-----|
| b                  | 314 | 314 | 440 | 440 | 500 | 560 | 680 |
| b1                 | 190 | 190 | 250 | 250 | 310 | 370 | 490 |
| c                  | 80  | 80  | 80  | 80  | 80  | 80  | 92  |

Dimensions in in.

| Number of cut-outs | 2     | 3     | 4     | 5     | 6     | 8     | 12    |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| b                  | 12.36 | 12.36 | 17.32 | 17.32 | 19.68 | 22.05 | 26.77 |
| b1                 | 7.48  | 7.48  | 9.84  | 9.84  | 12.20 | 14.57 | 19.29 |
| c                  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.62  |

Recommended replacement(s)