

# Product data sheet

Specifications



Selector switch head, Harmony XB4, metal, black, 22mm, long handle, 3 positions, stay put

ZB4BJ3

## Main

|                                 |                          |
|---------------------------------|--------------------------|
| Range of product                | Harmony XB4              |
| Product or component type       | Head for selector switch |
| Device short name               | ZB4                      |
| Bezel material                  | Chromium plated metal    |
| Mounting diameter               | 22 mm                    |
| Head type                       | Standard                 |
| Sale per indivisible quantity   | 1                        |
| Shape of signaling unit head    | Round                    |
| Type of operator                | stay put                 |
| Operator profile                | Black long handle        |
| Operator additional information | Non padlockable          |
| Operator position information   | 3 positions +/- 45°      |

## Complementary

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width                  | 29 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| CAD overall height                 | 38 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| CAD overall depth                  | 44 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Net weight                         | 0.04 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Mechanical durability              | 1000000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Electrical composition code        | C3 for <6 contacts using single blocks in front mounting<br>C4 for <6 contacts using single and double blocks in front mounting<br>C5 for <5 contacts using single blocks in front mounting<br>C6 for <5 contacts using single and double blocks in front mounting<br>C7 for <4 contacts using single blocks in front mounting<br>C8 for <4 contacts using single and double blocks in front mounting<br>C11 for <3 contacts using single blocks in front mounting |
| Device presentation                | Basic element                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Environment

|                                     |             |
|-------------------------------------|-------------|
| Protective treatment                | TH          |
| Ambient air temperature for storage | -40...70 °C |

|                                       |                                                                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                    |
| Overvoltage category                  | Class I conforming to IEC 60536                                                                                                                                                |
| IP degree of protection               | IP67 conforming to IEC 60529<br>IP69<br>IP69K                                                                                                                                  |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                                                             |
| IK degree of protection               | IK06 conforming to IEC 50102                                                                                                                                                   |
| Standards                             | EN/IEC 60947-5-1<br>UL 508<br>EN/IEC 60947-5-5<br>CSA C22.2 No 14<br>EN/IEC 60947-1<br>EN/IEC 60947-5-4<br>JIS C8201-5-1<br>JIS C8201-1                                        |
| Product certifications                | LROS (Lloyds register of shipping)<br>GL<br>CSA<br>DNV<br>BV<br>UL listed                                                                                                      |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

### Packing Units

|                              |                  |
|------------------------------|------------------|
| Unit Type of Package 1       | Db               |
| Number of Units in Package 1 | 1                |
| Package 1 Height             | 3.6 cm           |
| Package 1 Width              | 5.4 cm           |
| Package 1 Length             | 5.5 cm           |
| Package 1 Weight             | 45.4 g           |
| Unit Type of Package 2       | Gyári csomagolás |
| Number of Units in Package 2 | 5                |
| Package 2 Height             | 5 cm             |
| Package 2 Width              | 3.4 cm           |
| Package 2 Length             | 26.5 cm          |
| Package 2 Weight             | 227 g            |
| Unit Type of Package 3       | Doboz            |
| Number of Units in Package 3 | 200              |
| Package 3 Height             | 30 cm            |
| Package 3 Width              | 30 cm            |
| Package 3 Length             | 40 cm            |
| Package 3 Weight             | 9.624 kg         |

### Offer Sustainability


|                          |                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status | Green Premium product                                                                             |
| REACH Regulation         | <a href="#">REACH Declaration</a>                                                                 |
| REACH free of SVHC       | Yes                                                                                               |
| EU RoHS Directive        | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |

|                            |                                                                                                                                                                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Toxic heavy metal free     | Yes                                                                                                                                                                                                                                                                                   |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                                                                                                                                                                                |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                         |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                                                                                                                                                                               |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |



Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

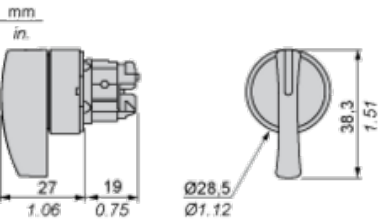


Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board                                                                                                                                                                                                                                                                        | Connection by Faston Connectors                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                             |  |
| <div>(1) Diameter on finished panel or support</div> <div>(2) 40 mm min. / 1.57 in. min.</div> <div>(3) 30 mm min. / 1.18 in. min.</div> <div>(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm<sup>+0.4</sup><sub>0</sub> / 0.88 in. <sup>+0.016</sup><sub>0</sub>)</div> <div>(5) 45 mm min. / 1.78 in. min.</div> <div>(6) 32 mm min. / 1.26 in. min.</div> |                                                                                    |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer’s Side)

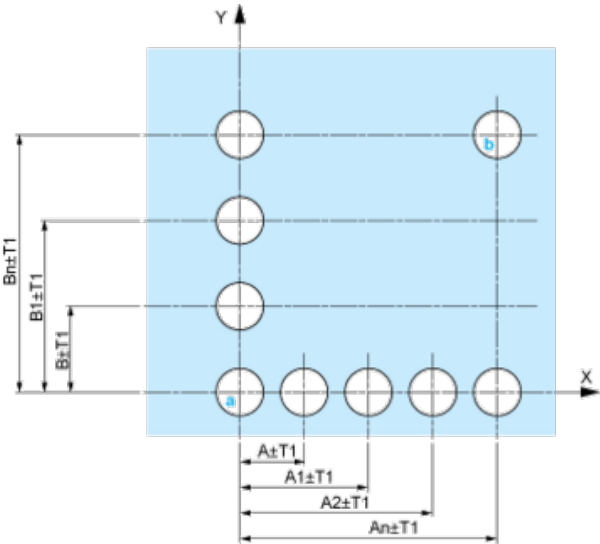


- A: 30 mm min. / 1.18 in. min.
- B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

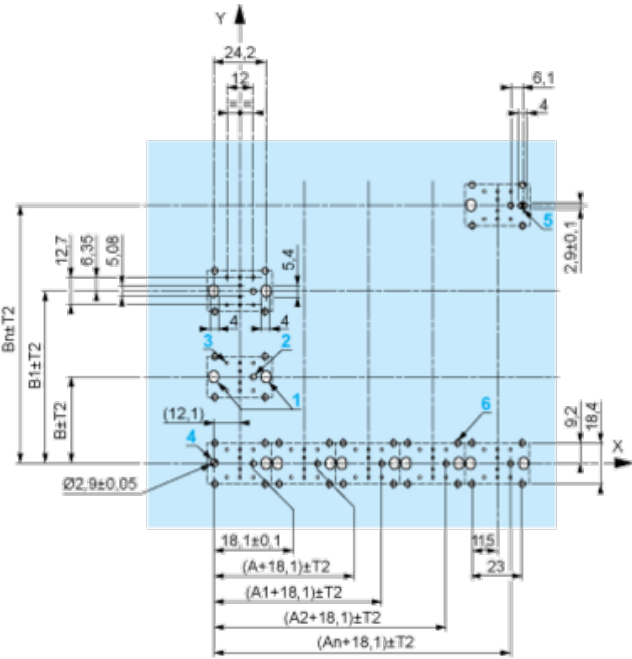


- A: 30 mm min.
- B: 40 mm min.
- Dimensions in in.



The cumulative tolerance must not exceed 0.3 mm / 0.012 in:  $T1 + T2 = 0.3 \text{ mm max.}$

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm$  0.1 / 0.88 in.  $\pm$  0.004
- Orientation of body/fixing collar ZB4 BZ009:  $\pm 2^{\circ}30'$  (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.




- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 for centring adapter ZBZ 01•
- 3 8  $\times$   $\varnothing$  1.2 mm / 0.05 in. holes
- 4 1 hole  $\varnothing$  2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes  $\varnothing$  2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

Electrical Composition Corresponding to Code C3

---






Electrical Composition Corresponding to Code C4

---



Electrical Composition Corresponding to Code C5

---




Electrical Composition Corresponding to Code C6

---




Electrical Composition Corresponding to Code C7

---




Electrical Composition Corresponding to Code C8

---



Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

---



Legend

---

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
|          |          | Bottom |        |        |        |
|          | Location |        | Left   | Centre | Right  |
|          | State    |        | 1      | 1      | 0      |
| Contacts | N/O      |        | closed | closed | open   |
|          | N/C      |        | open   | open   | closed |

Position 0°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
|          |          | Bottom |        |        |        |
|          | Location |        | Left   | Centre | Right  |
|          | State    |        | 0      | 0      | 0      |
| Contacts | N/O      |        | open   | open   | open   |
|          | N/C      |        | closed | closed | closed |


Position 45°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
|          |          | Bottom |        |        |        |
|          | Location |        | Left   | Centre | Right  |
|          | State    |        | 0      | 1      | 1      |
| Contacts | N/O      |        | open   | closed | closed |
|          | N/C      |        | closed | open   | open   |



Dimensions

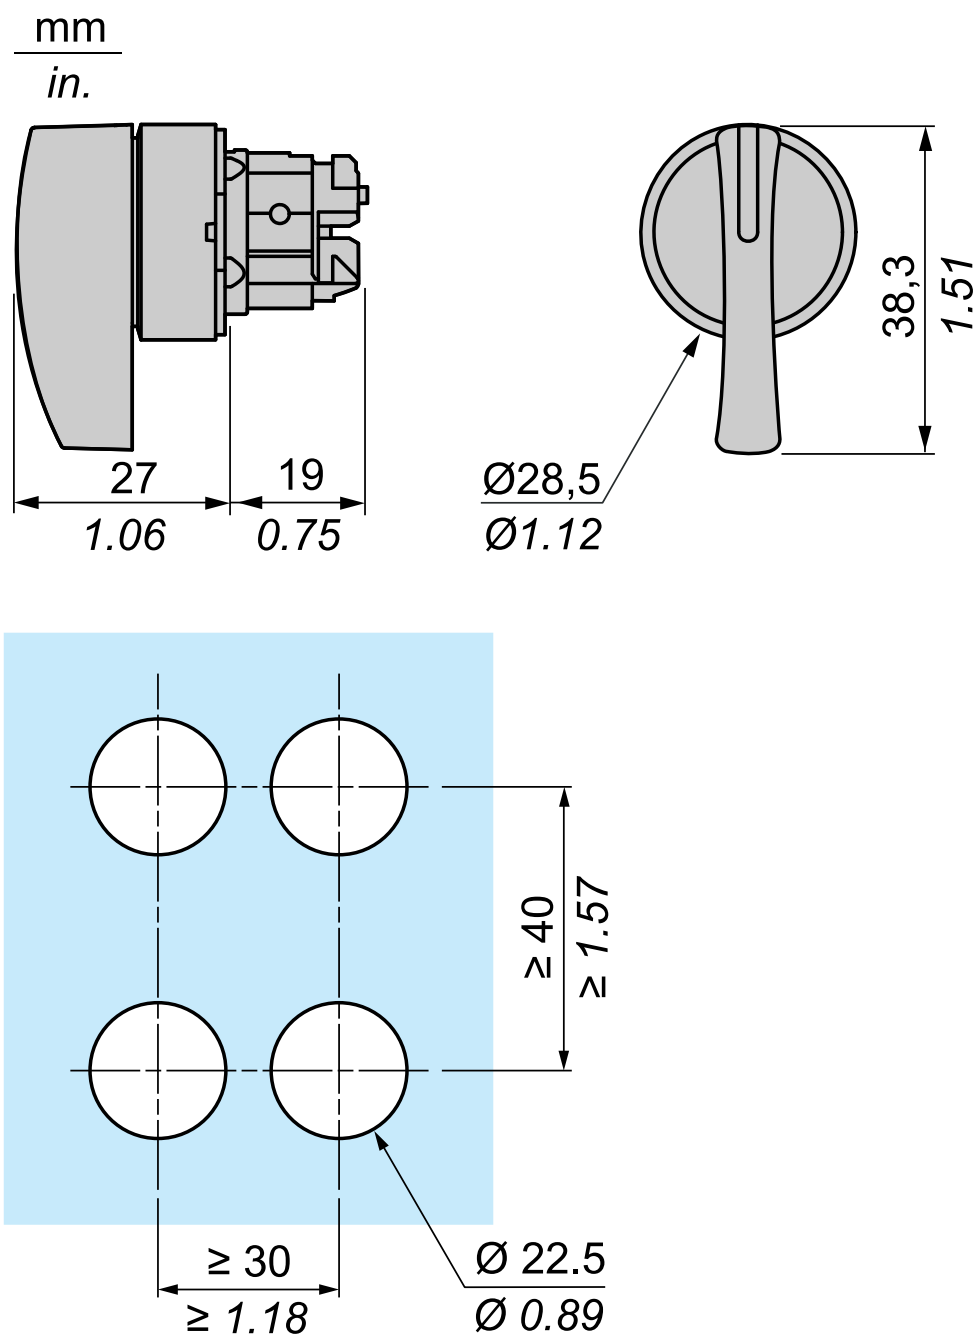

Recommended replacement(s)